CEAG Products
Explosion protected floodlights

CROUSE-HINDS SERIES

PXLED - Power Floodlight Series for Hazardous Areas

Explosion-protected LED floodlight series for Zone 1, 2, 21 and 22

EATON
Powering Business Worldwide

Ex-Floodlight PXLED

(Ex-Zone 1, 2, 21 and 22)

Lighting under harsh conditions

The new modular LED floodlight series PXLED is suited for nearly every kind of lighting task in hazardous areas, including applications in On- and Offshore, heavy industrial, chemical, petrochemical, oil and gas, pharmaceuticals, shipyards, dockyards, power generation, paper mills and wastewater treatment indoor and outdoor with potentially explosive areas under harsh conditions like vibrations, dust, moisture or corrosive atmospheres and extreme temperatures. The PXLED comes with a standard U-shaped mounting bracket for ceiling and wall mounting

Replacement of conventional light fittings up to 600 W

With a luminous flux from 5,000 lm up to 32.000 lm this floodlight series can be used to replace nearly every floodlight with conventional light sources with an equivalent power consumption from 70 W up to 600 W.

High efficient LED technology

High efficient power LED module with 110 Lumen/Watt enables up to 70 % energy-cost savings compared to conventional HID lamp.

Safety first

All PXLED multi-module floodlights from size 10L to 30L are equipped with a multichannel LED driver. This driver provides for each LED-module a separate power channel circuit. Even if one circuit fails, all other LED-modules are still working.

Modular design - just use the size you need

Thanks to the modular design of the PXLED series you can exactly choose the lumen output you need. There is no need to over/underdesign your lighting project. Six sizes are available from nominal 5.000 lm to more than 30.000 lm with a step-wide of 5000 lm.

Easy to install

A stainless steel swivel bracket with adjustable setting angle allows an easy alignment of the floodlight. A fixing screw

secures the alignment. The swivel bracket provides up to five Ø13 mm fixing holes for a safe assembly.

Together with two cable gland a large terminal compartment in Ex-e design allows cost saving through-wiring without additional terminal boxes.

The used Ex-e terminals can

clamp up to 6 mm² wiring.

Internal and external PE-terminals allows nearly all cabling

technique.

5 YEAR WARRANTY

Features

- High efficiency: up to 110 lm/W
- Operating temperature -50 °C up to +55 °C
- Suitable for Explosion Group IIC / IIIC environment
- Broad range of light output from 5,000 lm up to 32,000 lm
- Wide and narrow beam pattern (asymmetric beam on request)
- Long lifetime
- Ex-e compartment for driver & terminal for easy installation and maintenance

Designed for long lifetime

High ambient temperatures can drive the LED chip-temperature into a not permissible range. This would reduce the life-span of the LEDs tremendously. Eaton provides an enclosure design with large cooling pipes and a innovated heat reduction

design.

Tests done under the worst test conditions have shown that the LED-chip temperature is always below critical values. The designed life span for the LED (L80) is more than 60,000 h even at +55°C ambient temperature

The Eaton-LED driver is especially designed for the harsh conditions of hazardous environments. According to EN 61000-4-5 an electronic device must withstand a surge pulse of 1 kV between L- N, our LED driver is designed to withstand 4 kV between L- N and L, N - PE.

All electronic components with self-heating are over dimensioned to ensure a maximum maintenance-free period. The driver has an own Ex-certification "q" and is mounted within the Ex-e compartment.

In the very unlikely cause of an driver failure this unit can be changed separately from the floodlight.

Light distribution for various applications

Beside the various lumen output packages different light distributions can be realized with the PXLED-series.

A wide beam pattern as well as a narrow beam pattern is realized by the use of special designed lens caps for the LEDs. In addition, asymmetric light distributions are also available for special applications.

With a light transmission factor of more that 90 % we are able to offer a system efficiency of more than 110 lm/W.



wide beam lens caps



narrow beam lens caps

Type key for PXLED floodlight series

PXLED 10L A 7 57 C T0 E01

Type of fitting:	Size of fitting[1]:	Light distribution:	CRI [2]:	CCT [3]:	Front glass:	Terminals:	Cable entries/glands:
PXLED	5L = 5000 lm 10L=10000 lm 15L=15000 lm 20L=20000 lm 25L=25000 lm 30L=30000 lm	A = wide beam B = narrow beam C = asymetric1 D = asymetric2	7 = CRI >70 X = other on request	57 = 5700 K XX = other on request	C = clear F = frosted on request	T0 = type 2410 - max. 6 mm² TX= others on request	E01= 2 x M25 metal gland type ADE 1F2 E05= 2 x M25 plastic threaded plug E11= 1 x M25 metal gland type ADE 1F2, 1 x M25 plastic threaded plug EXX= others on request

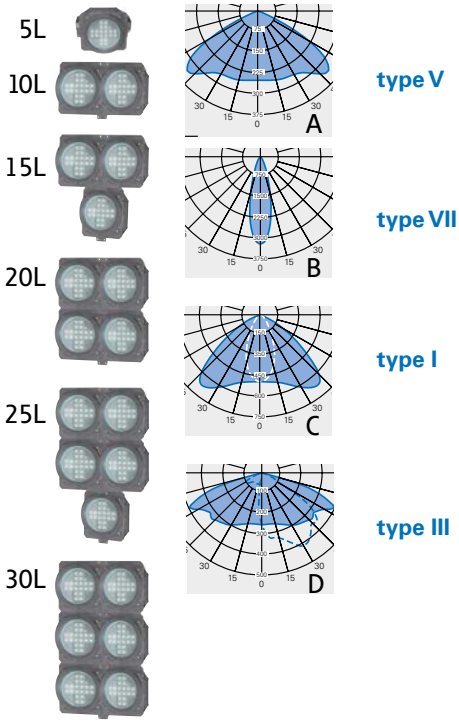

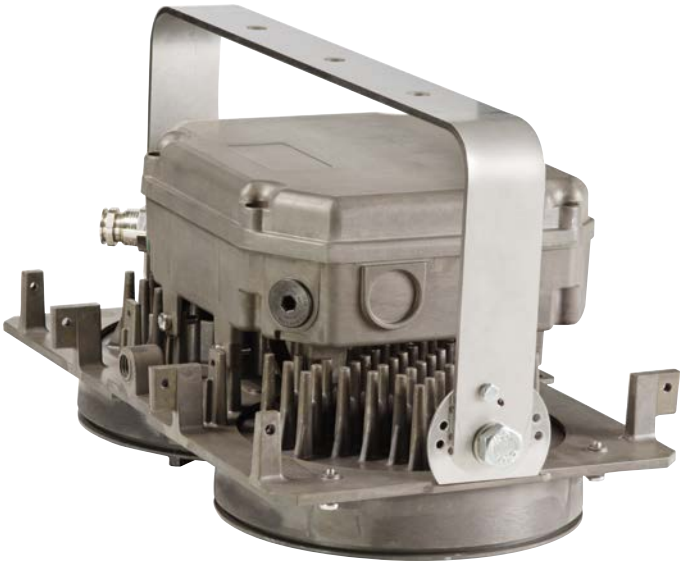

1) the lumen value is a design value and will not show the actual lumen output
2) CRI = Colour Rendering Index
3) CCT= Correlated Colour Temperature

Ordering details

PXLED for Ex-Zone 1, 2, 21 and 22

Ordering details PXLED

	Type	Lamp / illuminant	Light distribution *)	Description / Power	Cable glands	Order No..
	PXLED 5L B 757 C E01	LED system 5.386 lm	narrow beam	LED floodlight with swivel bracket 49 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 110 001**
	PXLED 5L B 757 C E05				2 x M25 plastic threaded plug	**1 3042 110 005**
	PXLED 5L A 757 C E01	LED system 5.207 lm	wide beam	LED floodlight with swivel bracket 49 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 111 001**
	PXLED 5L A 757 C E05				2 x M25 plastic threaded plug	**1 3042 111 005**
	PXLED 10L B 757 C E01	2 LED systems 10.772 lm	narrow beam	LED floodlight with swivel bracket 98 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 210 001**
	PXLED 10L B 757 C E05				2 x M25 plastic threaded plug	**1 3042 210 005**
	PXLED 10L A 757 C E01	2 LED systems 10.414 lm	wide beam	LED floodlight with swivel bracket 98 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 211 001**
	PXLED 10L A 757 C E05				2 x M25 plastic threaded plug	**1 3042 211 005**
	PXLED 15L B 757 C E01	3 LED systems 16.158 lm	narrow beam	LED floodlight with swivel bracket 147 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 310 001**
	PXLED 15L B 757 C E05				2 x M25 plastic threaded plug	**1 3042 310 005**
	PXLED 15L A 757 C E01	3 LED systems 15.621 lm	wide beam	LED floodlight with swivel bracket 147 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 311 001**
	PXLED 15L A 757 C E05				2 x M25 plastic threaded plug	**1 3042 311 005**
	PXLED 20L B 757 C E01	4 LED systems 21.544 lm	narrow beam	LED floodlight with swivel bracket 196 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 410 001**
	PXLED 20L B 757 C E05				2 x M25 plastic threaded plug	**1 3042 410 005**
	PXLED 20L A 757 C E01	4 LED systems 20.828 lm	wide beam	LED floodlight with swivel bracket 196 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 411 001**
	PXLED 20L A 757 C E05				2 x M25 plastic threaded plug	**1 3042 411 005**
	PXLED 25L B 757 C E01	5 LED systems 26.930 lm	narrow beam	LED floodlight with swivel bracket 245 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 510 001**
	PXLED 25L B 757 C E05				2 x M25 plastic threaded plug	**1 3042 510 005**
	PXLED 25L A 757 C E01	5 LED systems 26.035 lm	wide beam	LED floodlight with swivel bracket 245 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 511 001**
	PXLED 25L A 757 C E05				2 x M25 plastic threaded plug	**1 3042 511 005**
	PXLED 30L B 757 C E01	6 LED systems 32316 lm	narrow beam	LED floodlight with swivel bracket 294 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 610 001**
	PXLED 30L B 757 C E05				2 x M25 plastic threaded plug	**1 3042 610 005**
	PXLED 30L A 757 C E01	6 LED systems 31242 lm	wide beam	LED floodlight with swivel bracket 294 W	2 x M25 metal cable gland ADE 1F2 for Ø 10 - 17 mm	**1 3042 611 001**
	PXLED 30L A 757 C E05				2 x M25 plastic threaded plug	**1 3042 611 005**

*) Asymmetric light distribution on request

Dimension drawing

PXLED for Ex-Zone 1, 2, 21 and 22

PXLED 5L

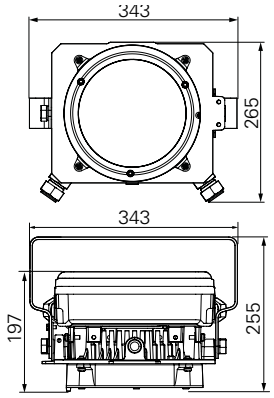

PXLED 15L

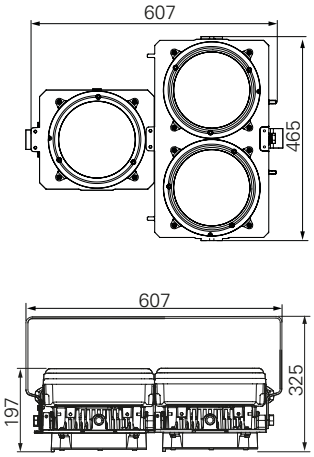

PXLED 25L

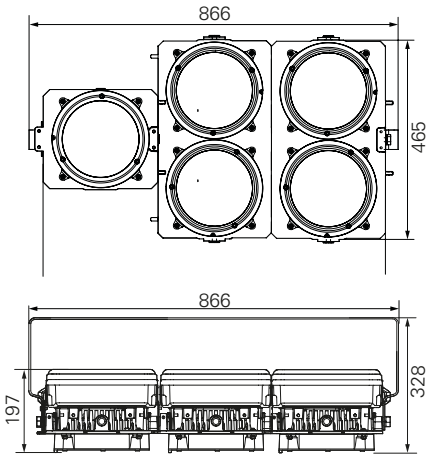

PXLED 10L

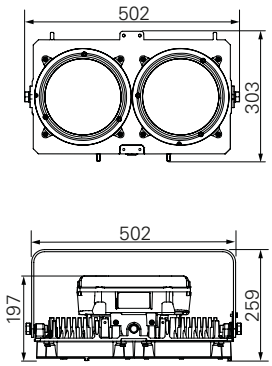

PXLED 20L

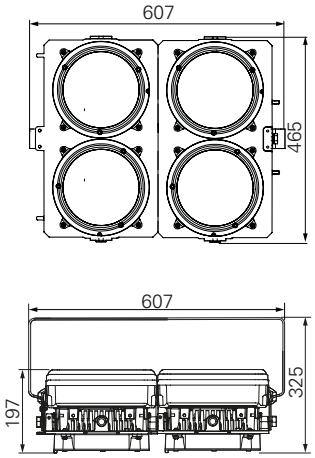

PXLED 30L

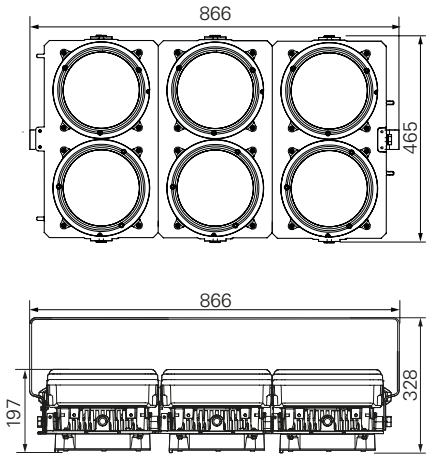

Dimensions in mm

Swivel bracket

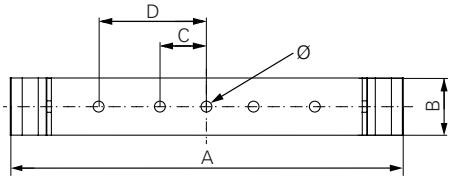

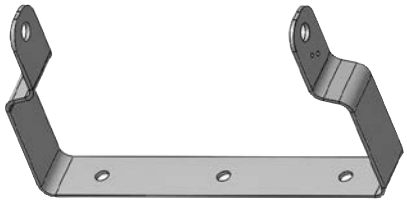

Swivel bracket for PXLED - Dimensions

Dimensions in mm	A	B	C	D	Ø
PXLED 05	343	50	120	-	13
PXLED 10	476	50	120	-	13
PXLED 15	606	50	120	-	13
PXLED 20	606	50	120	-	13
PXLED 25	858	50	120	270	13
PXLED 30	858	50	120	270	13

Technical data, Polar curve,

PXLED for Ex-Zone 1, 2, 21 and 22

Technical data

	PXLED 5L	PXLED 10L	PXLED 15L	PXLED 20L	PXLED 25L	PXLED 30L
Type Examination Certificate	BVS 17 ATEX E 013 X					
IECEx Certificate of conformity	IECEx BVS 17.0004 X					
Marking accd. 2014/34/EU	Ⓔx II 2 G Ex db eb op is q IIC T4 Gb/ Ⓔx II 2 D Ex tb op is IIIC T100°C Db					
Marking accd. to IECEx	Ex db eb op is q IIC T4 Gb/ Ex tb op is IIIC T100°C Db					
Certification accd. to TR CU 012/2011 EAC [1)]	RU C-DE.AA87.B.00594					
Permissible ambient temperature	-50 °C up to +55 °C					
LED lifetime L80	>200,000 h @ 25 °C / 60,000 h @ +55 °C					
Driver lifetime C10	>100,000 h @ 25 °C / 60,000 h @ +55 °C					
Rated voltage	110 - 277 V AC / 127 - 270 V DC					
Rated current [2)]	0.24 A	0.48 A	0.72 A	0.96 A	1.20 A	1.44 A
Frequency	0/50 - 60 Hz					
Power factor cos φ [1)]	≥ 0.95					
Circuit	Electronic driver					
Protection class	I					
Light distribution	Wide beam and narrow beam (asymmetric beam on request)					
Light colour / CRI	5700 K / R_a >70 (other colours on request)					
Enclosure colour	Dark grey					
Connecting terminals	6 poles standard (L, L1, L2, L3, N, PE / up to 6 mm² / others on request)					
Enclosure material	Anodized copper-free Aluminium					
Weight	9,9 kg	14,4 kg	24,3 kg	28,7 kg	38,5 kg	41,1 kg
Cable glands / gland plates / enclosure drilling	2 x M25 metal thread nickel plated (E01) or 2 x M25 threaded plug (E05) (others on request)					
Degree of protection accd. to EN 60529	IP66/67 (coming soon)					
Protective cover / protective bowl	Toughened glass, clear (frosted on request)					
Swivel bracket	AiSi 316L stainless steel					

[1)] Please ask our sales service for the special Order No.
[2)] Typical value at 230 V

Polar curve

Polar curve PXLED 5L - 30L, narrow beam - type VII

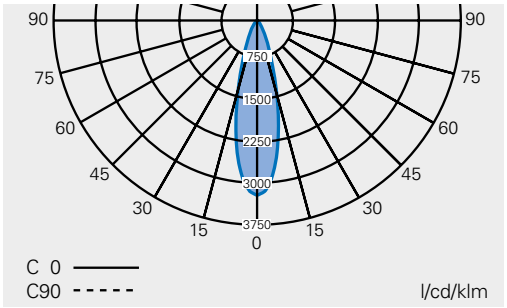

Polar curve PXLED 5L - 30L, wide beam - type V

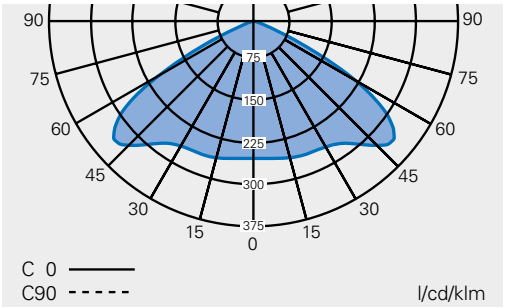

Polar curve PXLED 5L - 30L,asymmetric - type I

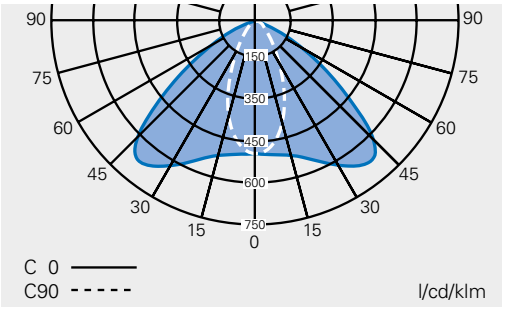

Polar curve PXLED 5L - 30L,asymmetric - type III

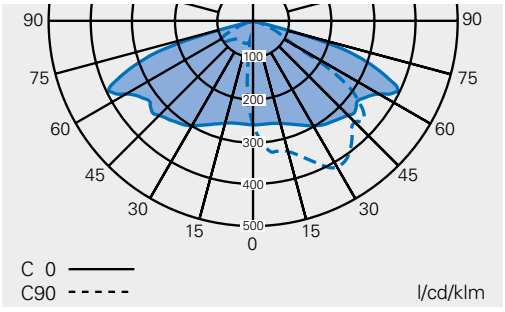

One for all applications

PXLED Application

Marine/Offshore

Cold environment

Industrial production area

Heavy Industry

Oil & Gas

Pharmaceutical industry

Refineries

Extreme Conditions

Chemical industry

Eaton's Crouse-Hinds Business

The safety you rely on.

See the complete offering of Hazardous and Industrial Products at www.crouse-hinds.de.

U.S. (Global Headquarters): Eaton's Crouse-Hinds Business

1201 Wolf Street
Syracuse, NY 13208

(866) 764-5454
FAX: (315) 477-5179
FAX Orders Only:
(866) 653-0640

CrouseCustomerCTR@Eaton.com

For more information:
If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

Australia
Phone +61-2-8787-2777
Fax +61-2-9609-2342
crousehindsanz@eaton.com

China
Phone +86-21-2899-3600
Fax +86-21-2899-4055
ECHsales@eaton.com

Great Britain
Phone +44-247-630-89 30
Fax +44-247-630-10 27
sales5@eaton.com

India
Phone +91-124-4683888
Fax +91-124-4683899
cchindia@eaton.com

Canada
Toll Free +1-800-265-0502
Fax +1-800-263-9504
Fax orders only:
+1-866-653-0645

Korea
Phone +82-2-3484-6783
Fax +82-2-3484-6778
CCHK-sales@
cooperindustries.com

Mexico/Latin America/ Caribbean
Phone +52-555-804-4000
Fax +52-555-804-4020
mxmercadotecnia@
cooperindustries.com

Spain
Phone +34-9-37362710
Fax +34-9-37835055
sales.CCH.es@
cooperindustries.com

Middle East (Dubai)
Phone +971-4-427-2522 / 2500
Fax +971-4-429-8521
CHMEsales@Eaton.com

The Netherlands
Phone +31-10-2452145
Fax +31-10-2452121
CHRD_mail@Eaton.com

Norway
Phone +47-32-244600
Fax +47-32-244646
CHLIoffice@eaton.com

Singapore:
Phone +65-6645-9888
Fax +65-6297-4819
CHSI-Sales@Eaton.com

Turkey
Phone +90-216-464-20-20
Fax +90-216-464-20-10
infoEGTurkey@eaton.com

Russia
Phone +7-495 510-24-27
Fax +7-495 510-24-28
info@cooper.ru.com
www.cooper-russia.ru

Eaton's Crouse-Hinds Business
Neuer Weg – Nord 49
D-69412 Eberbach

Phone +49 (0) 6271/806-500
Fax +49 (0) 6271/806-476
E-mail info-ex@eaton.com
Internet www.crouse-hinds.de

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2017 Eaton Corporation
All Rights Reserved

Printed in Germany
Publication No. BR 300 8000 2288
March 2017

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton's Crouse-Hinds Business
1201 Wolf Street
Syracuse, NY 13208
(866) 764-5454
CrouseCustomerCTR@Eaton.com

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Powering Business Worldwide