# K5

## LED Linear High Bay Light

**175LM/W**

100W 150W 200W 250W
300W 400W 500W

Zigbee
Dimming
Detective Range 60°/90°/120°
Daylight sensor
Wireless dimmer
Motion sensor
MOTION DETECTION 80 FEET
7 years warranty
c UL us E484577
DLC
SAA
TÜV SÜD
VEET CB IK10

# Features

There is a junction box alongside the fixture for preventing wiring exposed outside. It is safer practice and complied with wiring code

Thinner and lighter housing
Using high heat-conducting aviation aluminium materialsisolating light source and led driver to reduce light loss and increase power factor of led driver

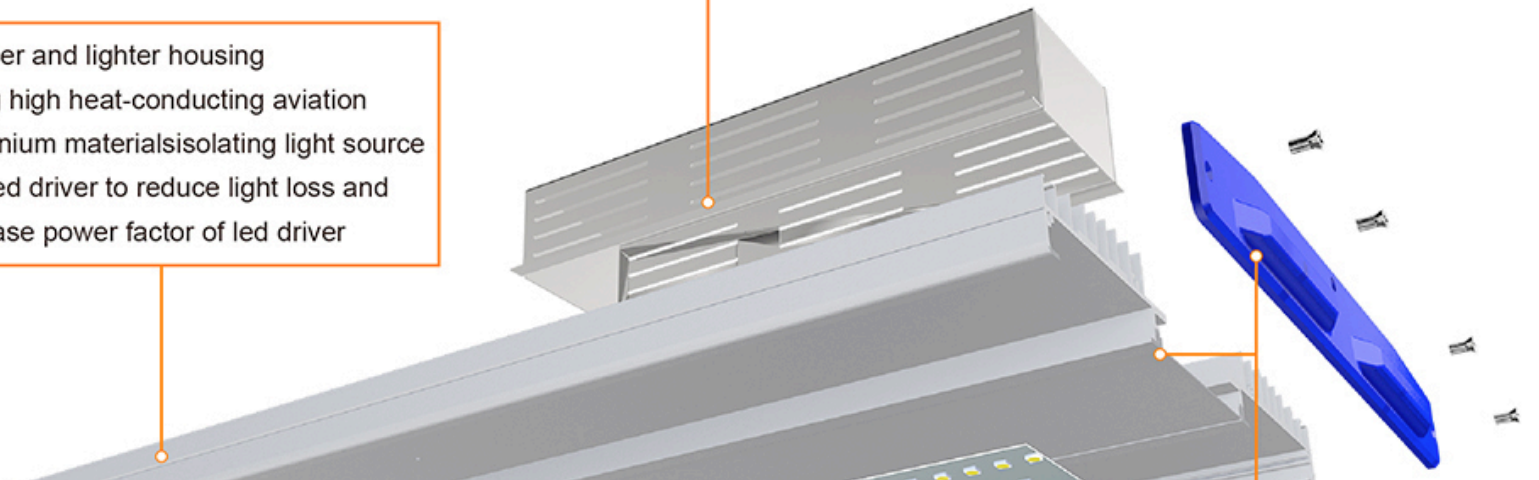

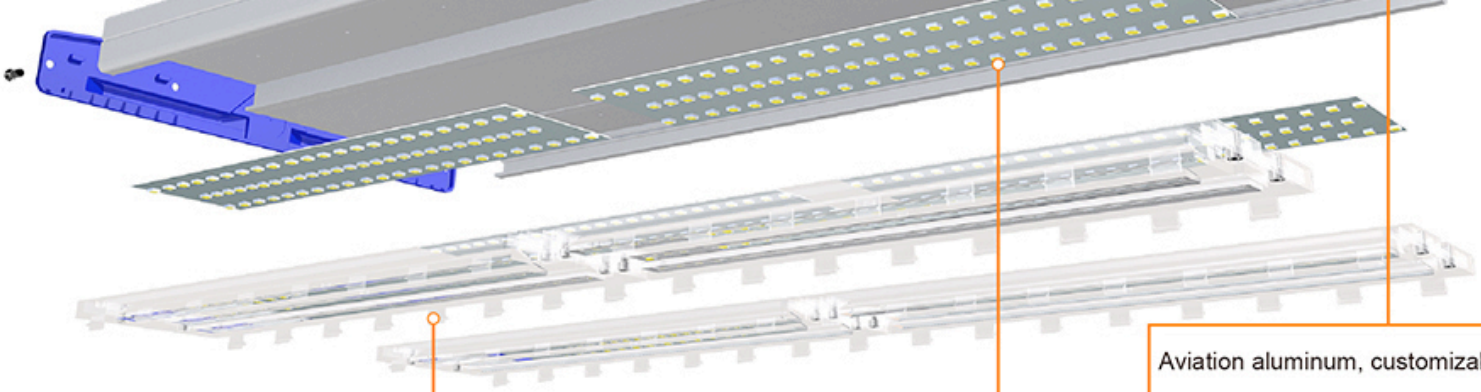

Aviation aluminum, customizable colors

3030 SMD LED chip,high lumen
175LM/W

The lenses are fixed by snap with less screws which makes assembling very conveniently.
With integral waterproof ruber around lens and rubber plug designed in outlet terminal, IP rating up to IP54
Three-dimensional diamond light guide technology


40.5mm
318.0mm
299.0mm

100W/150W

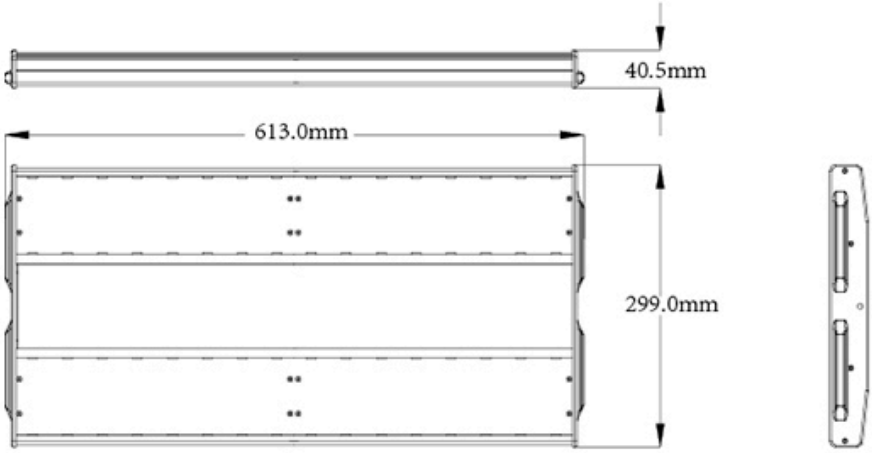
40.5mm
613.0mm
299.0mm

200W/250W

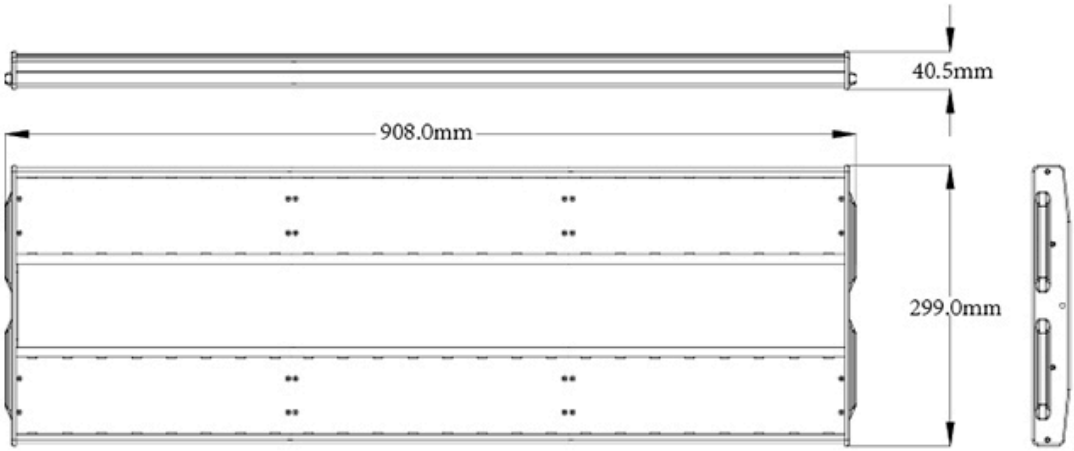
40.5mm
908.0mm
299.0mm

300W

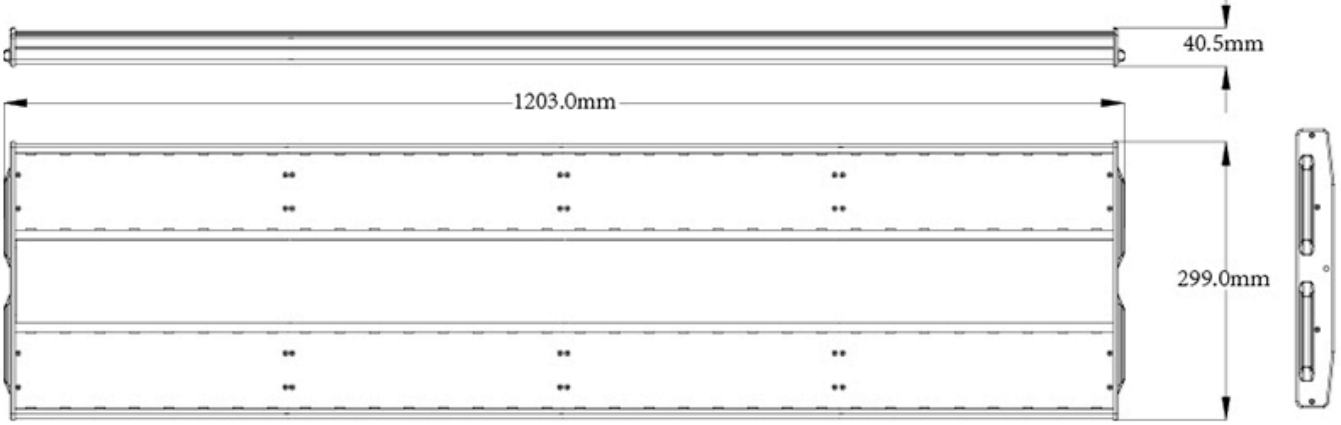
40.5mm
1203.0mm
299.0mm

400W/500W



60°



90°



120°

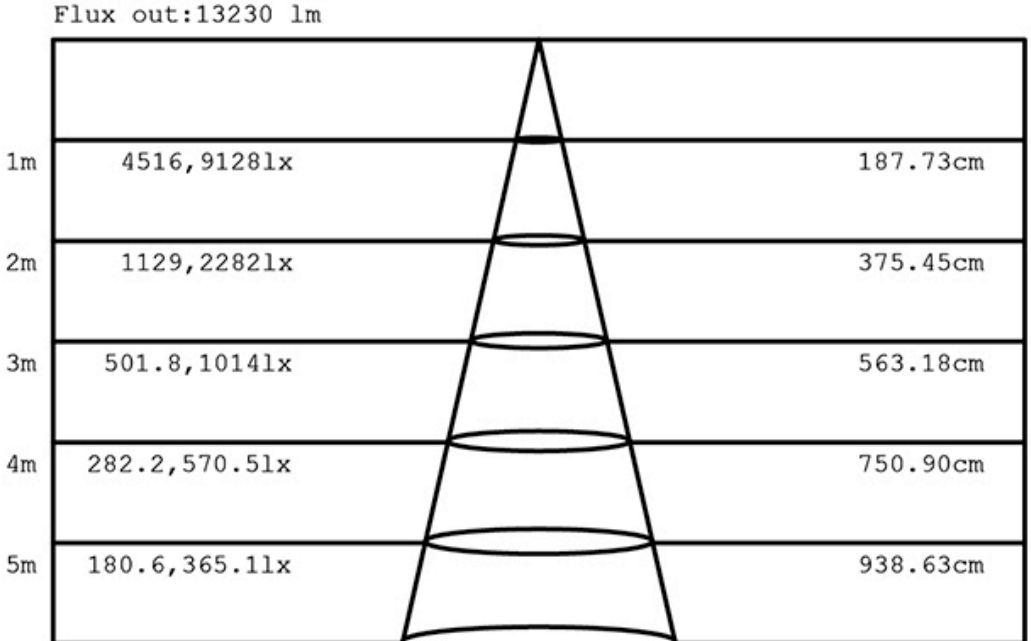

Flux out:13230 lm

| | | |
|---|---|---|
| 1m | 4516,9128lx | 187.73cm |
| 2m | 1129,2282lx | 375.45cm |
| 3m | 501.8,1014lx | 563.18cm |
| 4m | 282.2,570.5lx | 750.90cm |
| 5m | 180.6,365.1lx | 938.63cm |

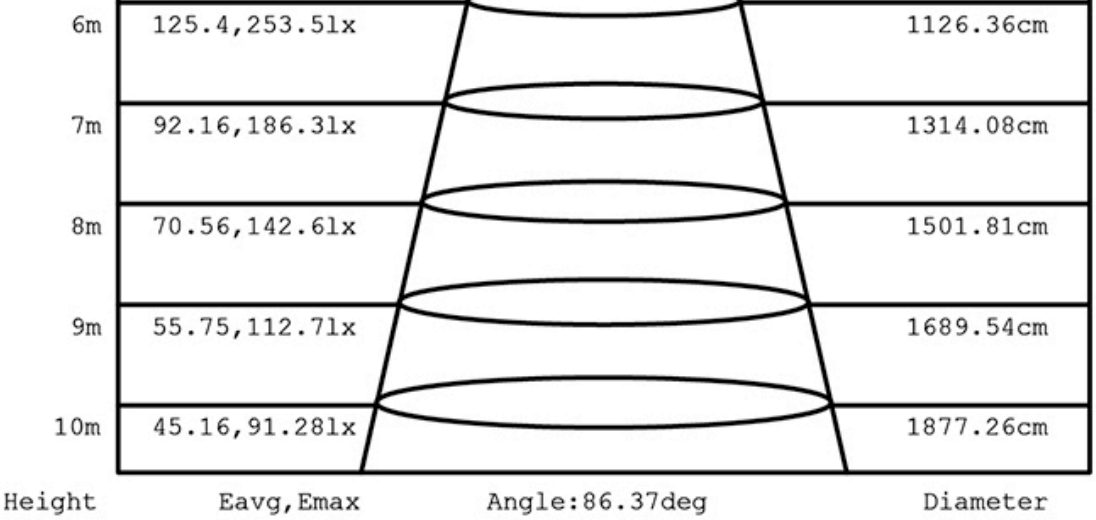

**Note:** The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

# Glowing on both side

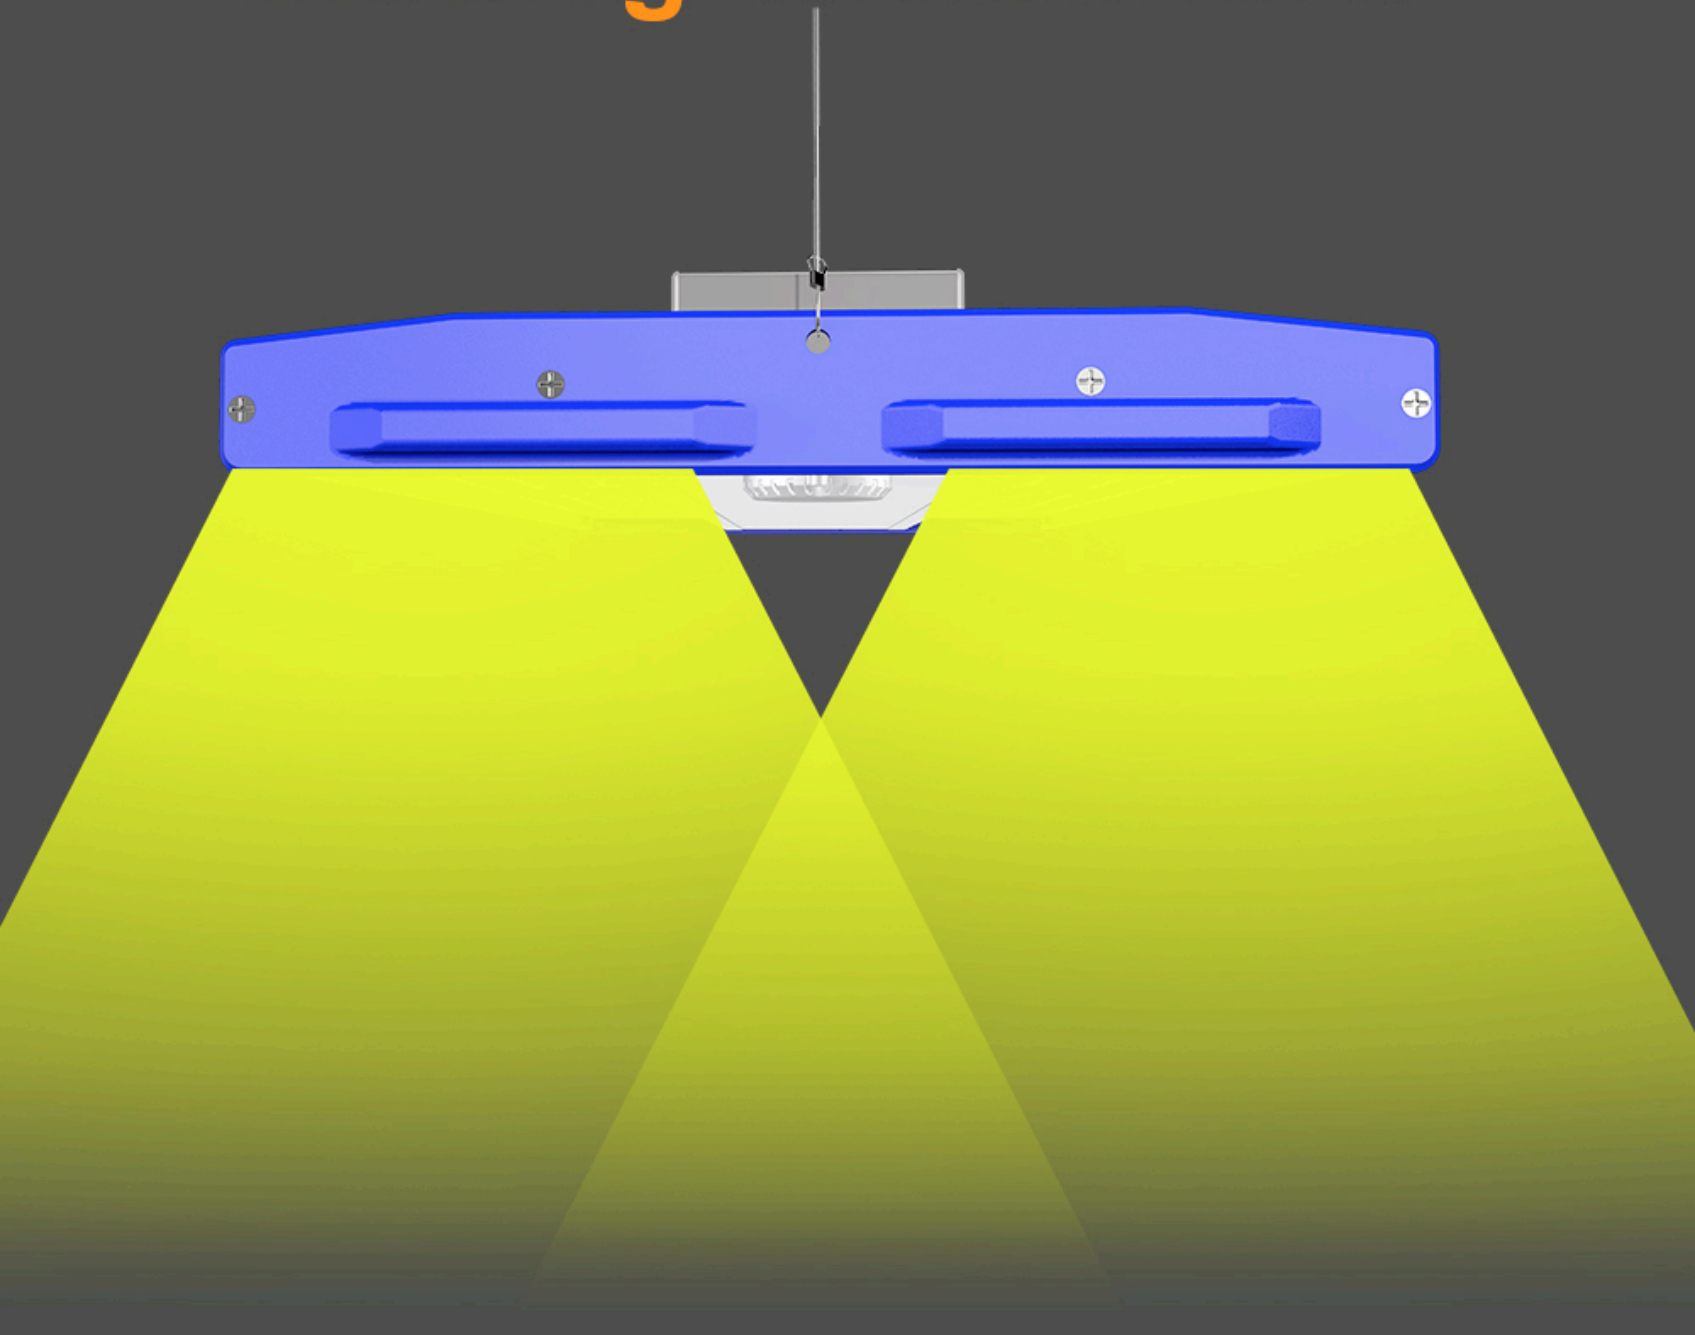

# High efficient heat dissipation

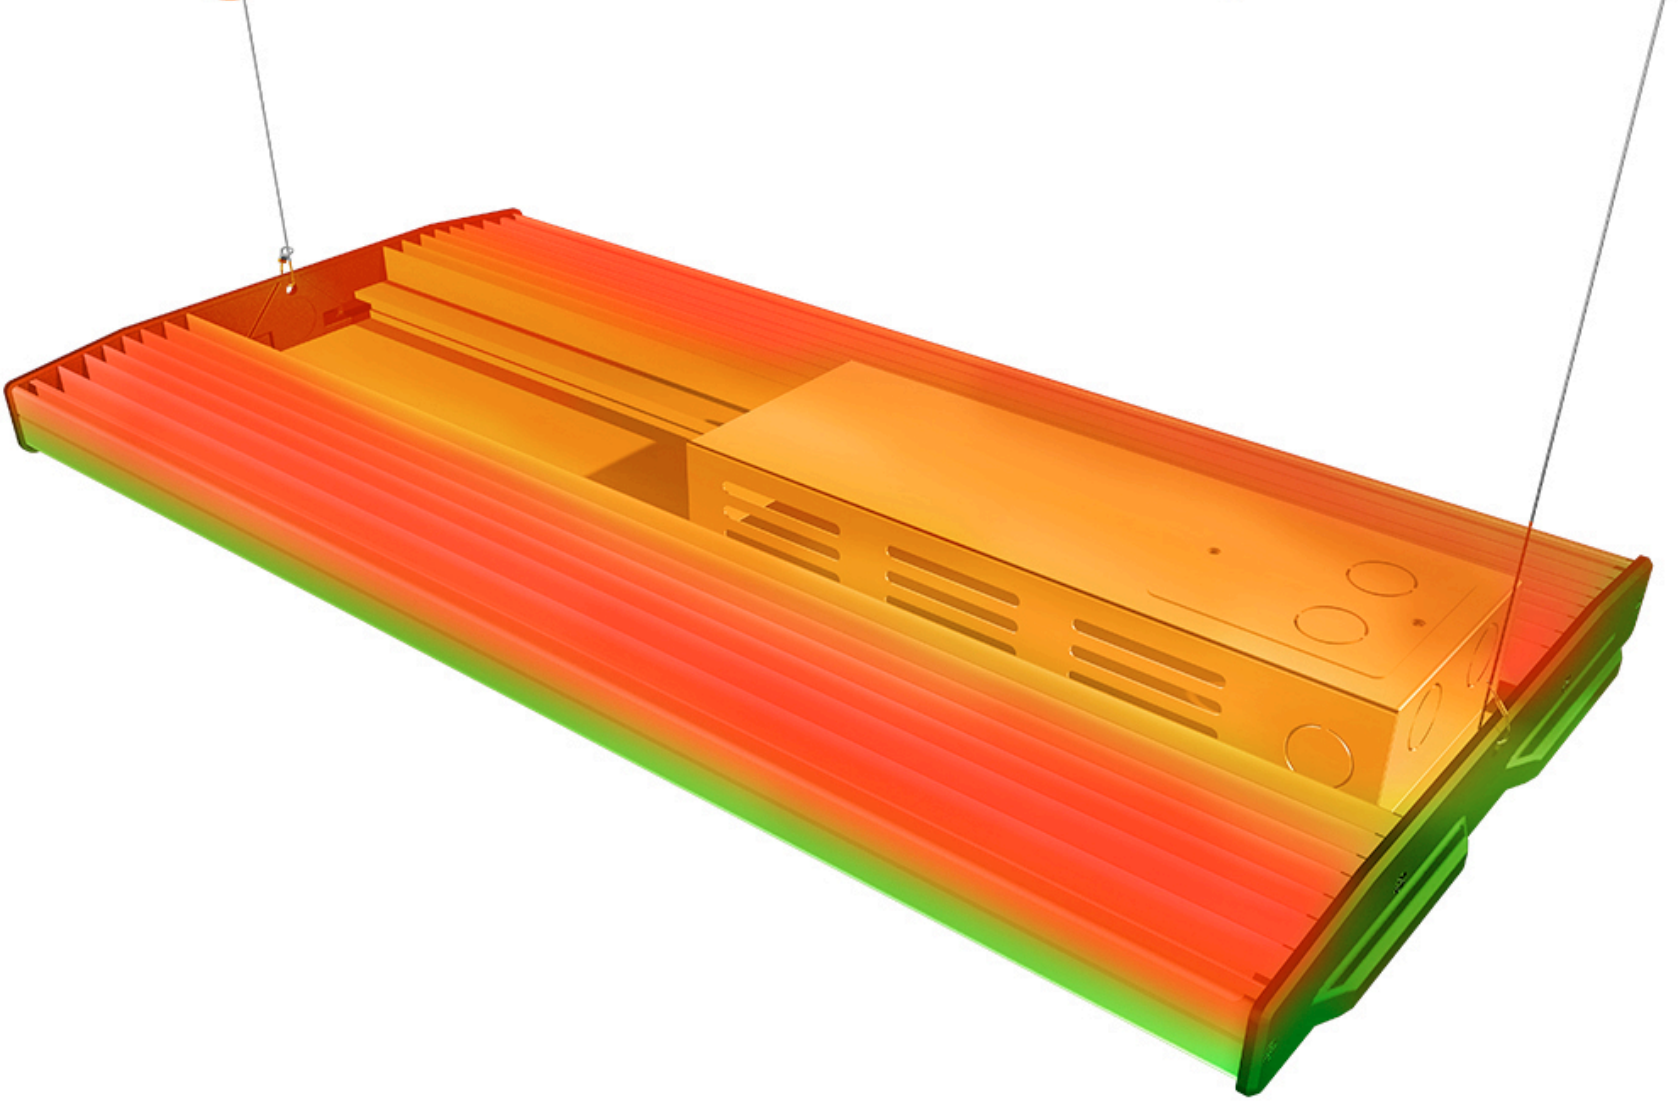

# Snap-in Type Lens

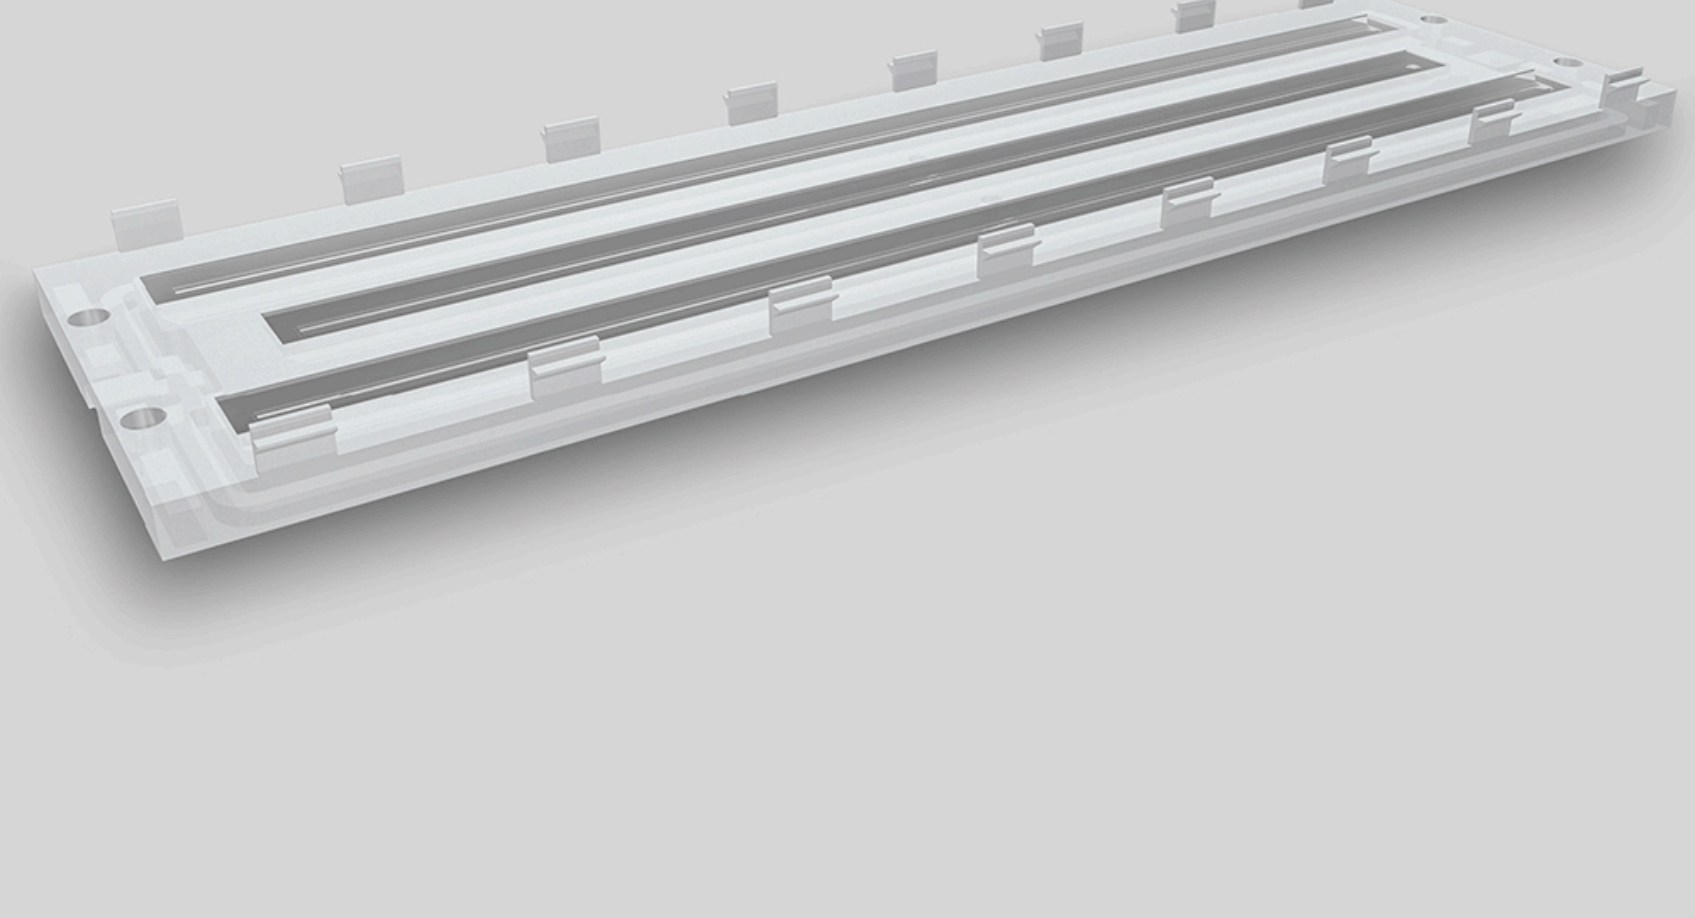

# Independent power box to prevent wiring exposure

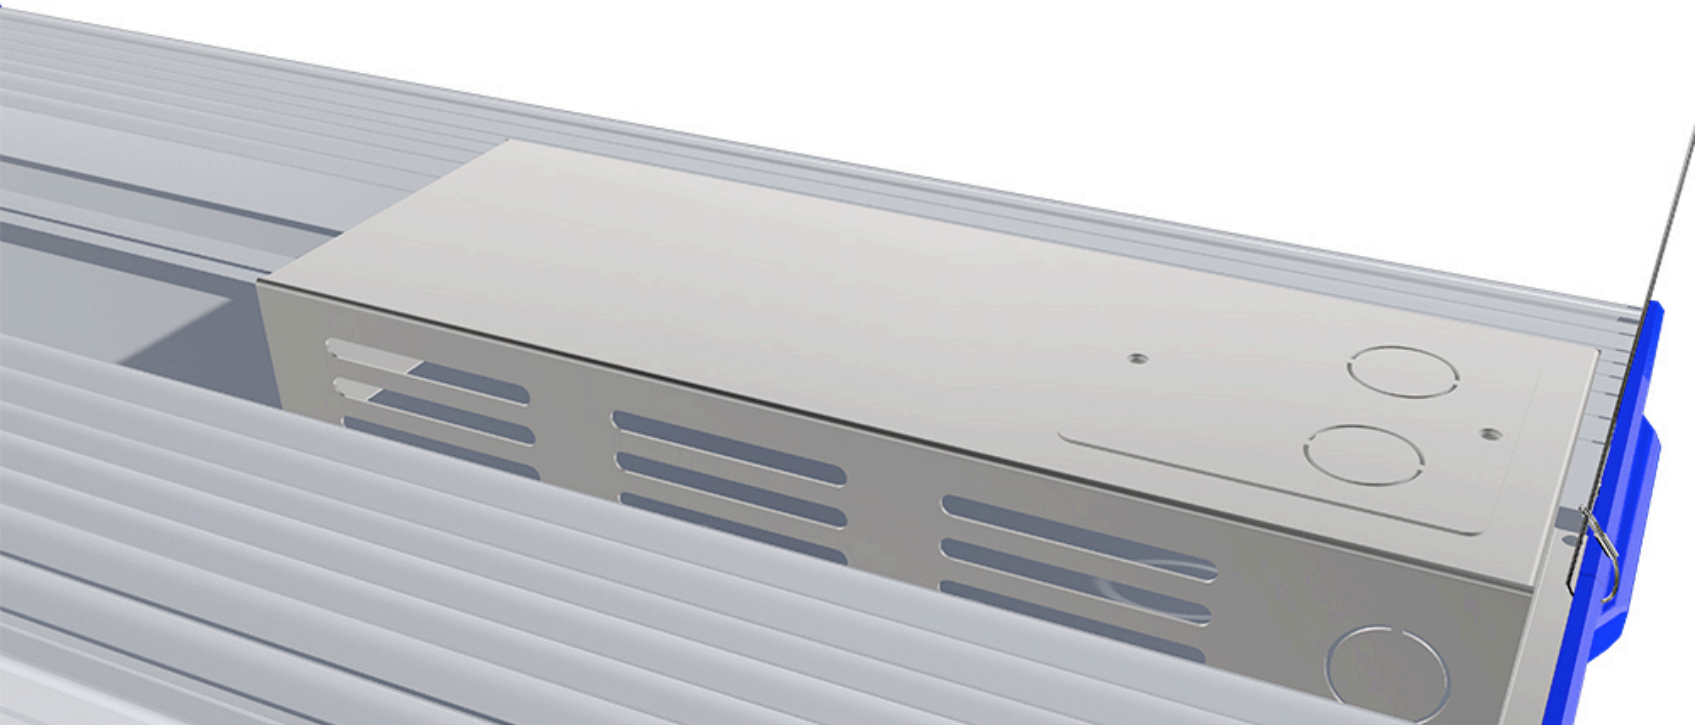

# Side cut-out apply for Intelligent accessories

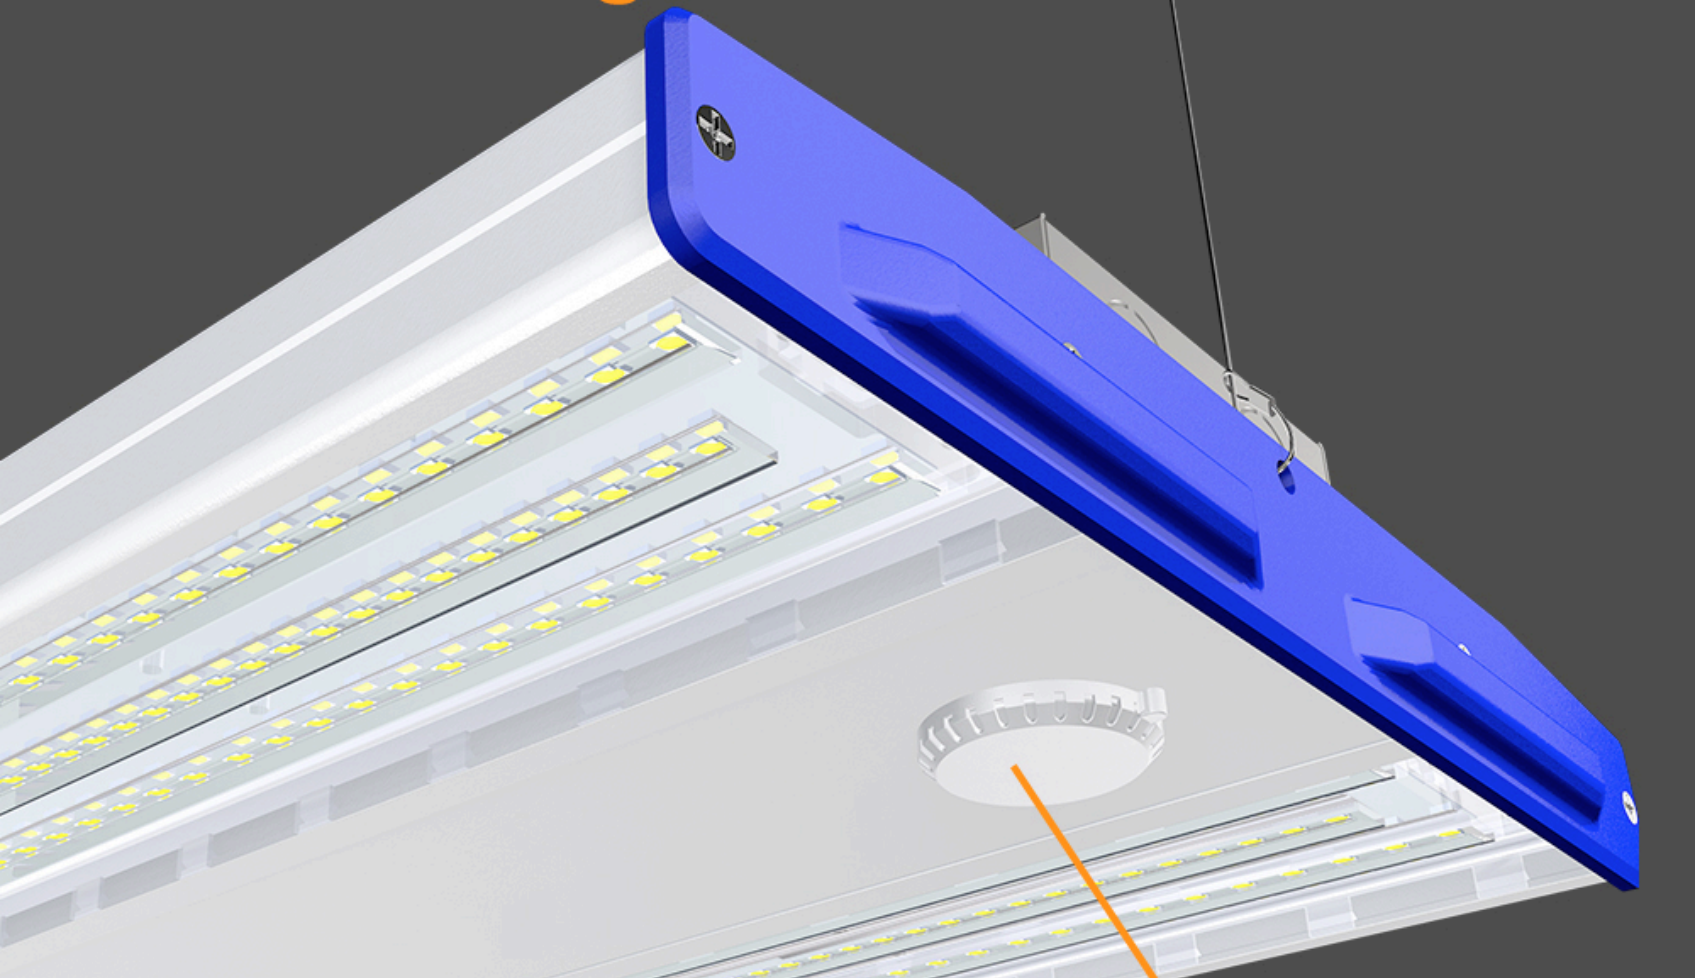

## Installation

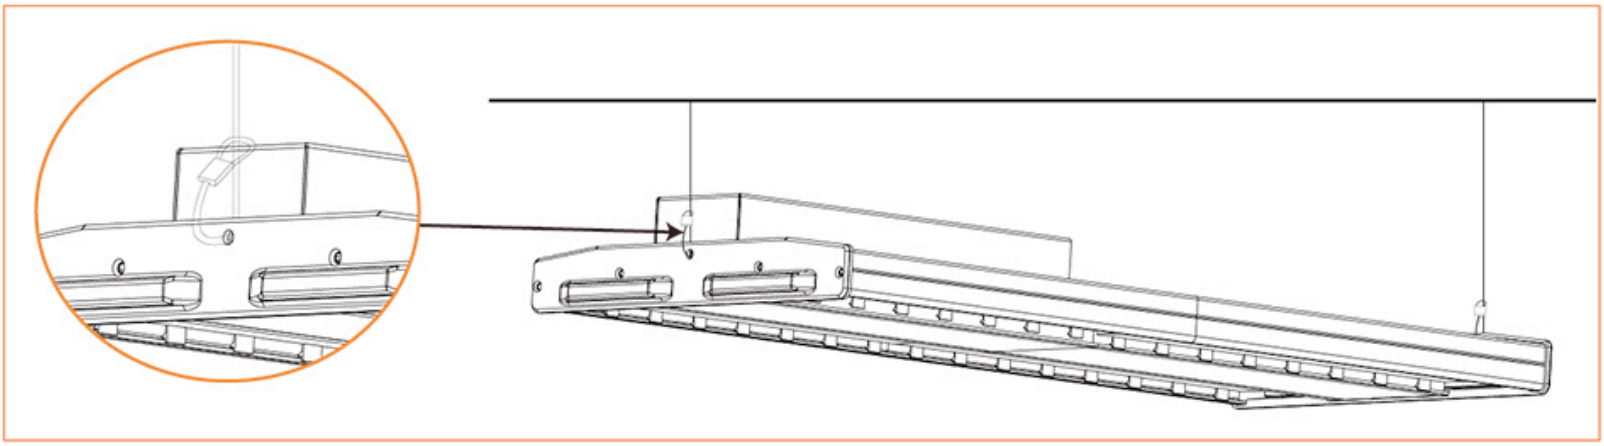

## APPLICATION

RHIMEX